



# ATG-R01-40A

Residential EV Charger

Charge forward  
with one the best  
smart EV charging  
stations you can  
find in the market.





## Key Features



### Charging Power

Allowing for significantly increased charging speed – up to 9.6kW of charging power at 40 amps.



### Ease of Use

18ft cable allows customers to easily reach their EV's charging port.



### Installation Versatility

Installation versatility with indoor and outdoor usage rating (NEMA Type 4).



### Universal Compatibility

SAE-J1772 compliance ensures compatibility with all EVs.



### Smart Connected

Intelligently connects the device through WIFI or Bluetooth to remote control or monitor your charger.




### Onboard Intelligence

Plug in, charge, and manage your schedule even when you can't connect to the internet.



## Dimensional data

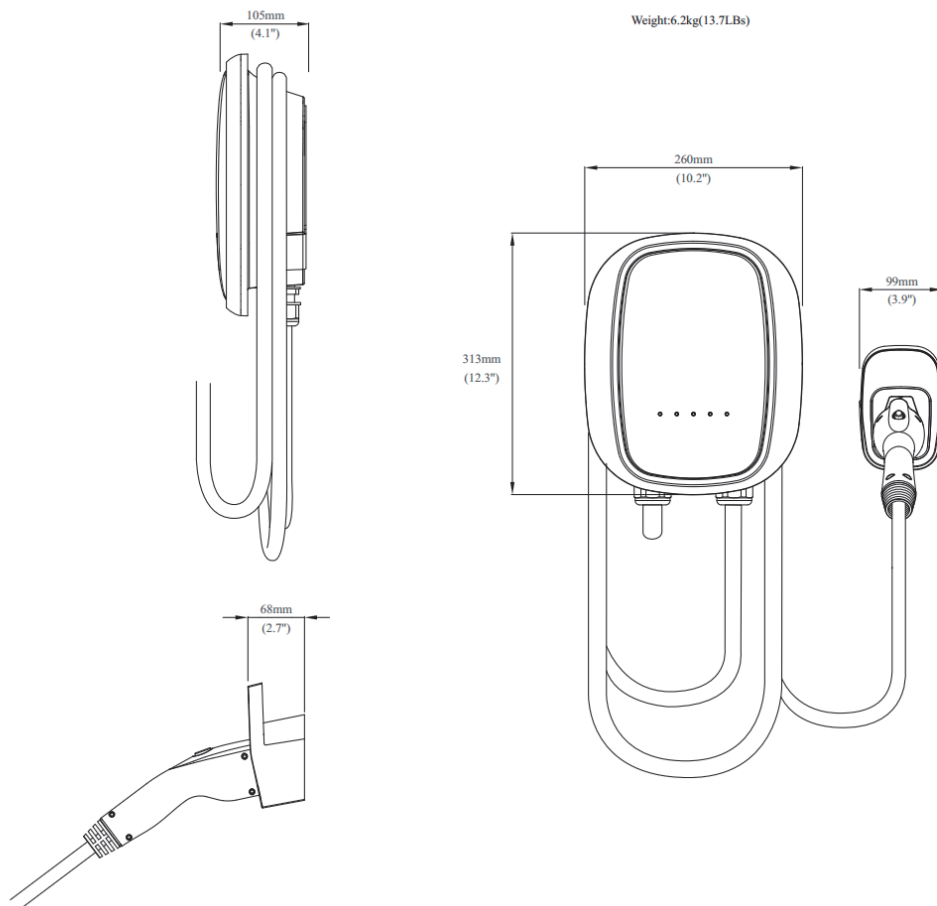

# Residential EV Charger

ATG-R01-40A



## Specifications

Electrical Characteristics	<ul style="list-style-type: none"> <li>• Safety Rated: 40A Max</li> <li>• Single phase input: nominal voltage 208-240 VAC~ 60 Hz</li> <li>• Power: 9.6kW at 240VAC</li> </ul>
Input Cable	<ul style="list-style-type: none"> <li>• NEMA 14-50 Plug.</li> </ul>
Output Cable & Connector	<ul style="list-style-type: none"> <li>• 18ft/5.5m cable</li> <li>• SAE J1772 standard compliant</li> </ul>
APP	<ul style="list-style-type: none"> <li>• Precision measurement of power, energy, voltage &amp; current</li> <li>• Automated notifications: time-of-use in effect, start of charge, end of charge, unit offline, unit back online, car not plugged in by a set time</li> </ul>
Smart Grid Connectivity	<ul style="list-style-type: none"> <li>• Built-in Wi-Fi connectivity (802.11b/g/n2.4GHz)</li> </ul>
Firmware	<ul style="list-style-type: none"> <li>• Over-the-air(OTA) upgradeable firmware</li> </ul>
Emissions Reduction	<ul style="list-style-type: none"> <li>• Available via optional software upgrade</li> </ul>
Enclosure	<ul style="list-style-type: none"> <li>• Dynamic LED lights show charging status: standby, CP connectivity, charging in progress, fault indicator, network connectivity</li> <li>• NEMA Enclosure Type4: Weatherproof, dust-tight</li> <li>• IK10: Resistant polycarbonate case</li> <li>• Quick-release wall mounting bracket included</li> <li>• Operating Temperature: -22°F to 122°F (-30°C to 50°C)</li> </ul>
Dimensions	<ul style="list-style-type: none"> <li>• Main enclosure: 12.3inx10.2inx4.1inch (313mmx260mmx105mm)</li> </ul>
Codes & Standards	<ul style="list-style-type: none"> <li>• NEC625 compliant,UL2594 compliant, OCPP 1.6J, FCC Part 15 Class B, Energy Star</li> </ul>
SafetySafety	<ul style="list-style-type: none"> <li>• ETL Listed</li> </ul>
RFID	<ul style="list-style-type: none"> <li>• Support</li> </ul>
Warranty	<ul style="list-style-type: none"> <li>• 5 years limited product</li> </ul>